

A1 INSTALLATION DRAWING

IF THIS DOCUMENT IS PRINTED IN HARDCOPY, IT IS FOR INFORMATION USE ONLY AND THEREFORE IS NOT SUBJECT TO UPDATING CONTROLS. ALWAYS REFER TO SOLIDWORKS VIEWER FOR LATEST ISSUE



THIS DRAWING IS CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOANED OR COPIED OR DISCLOSED TO ANY OTHER PERSON OR USED FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF AP RACING LTD.



AP Racing
Wheler Road
Coventry
CV3 4LB

Tel: +44 (0) 24 7663 9595
Fax: +44 (0) 24 7663 9559
e-mail: engineering@apracings.com
Web site: <http://www.apracings.com>

© AP Racing Ltd. 2005

DISC PART NUMBERS

CP3581-1136CG RH AS DRAWN
CP3581-1137CG LH OPPOSITE
THIS IS A 48 VANE DISC OF MASS 7.6 Kg

USE BOBBIN PART No. CP2494-589 TO ACHIEVE STANDARD 0.45/0.35 FLOAT.

SUFFIX TO DISC PART NUMBERS:-



SUFFIX DETAILS

P PLAIN (NO GROOVES)
CGnn CURVED GROOVES AS SHOWN, VALUE nn PER FACE.
eg CG8 MEANS 8 CURVED GROOVES PER FACE.

THIS DISC WAS DESIGNED TO WORK WITH A D54 DEPTH PAD


FOR DISC MOUNTING TECHNIQUES, BEDDING PROCEDURE AND DISC COOLING RECOMMENDATIONS SEE AP RACING BRAKE DISC CATALOGUE.

DISC INSTALLATION

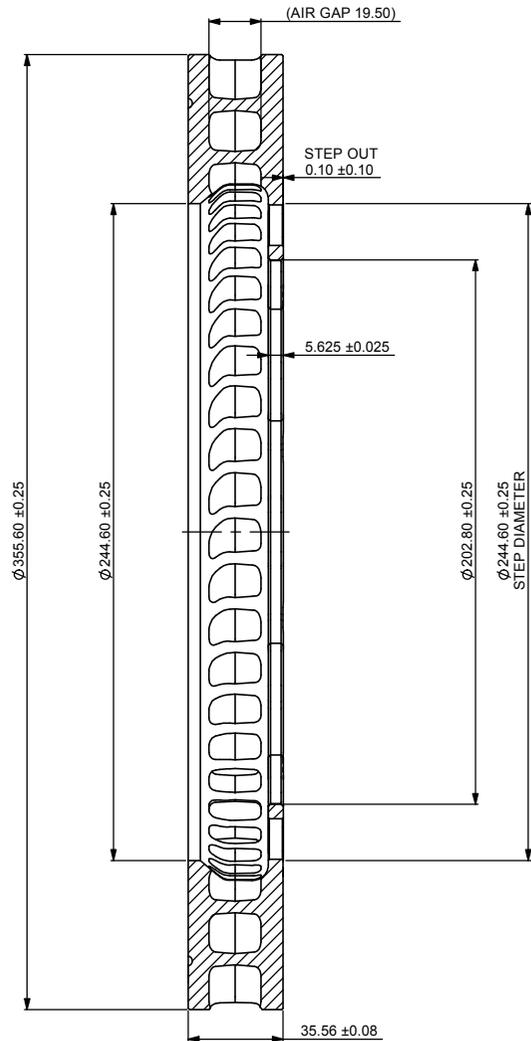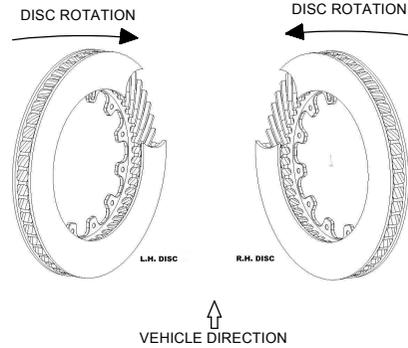

DISC MOUNTING PC Ø228.60

12 SLOTS EQUI-SPACED

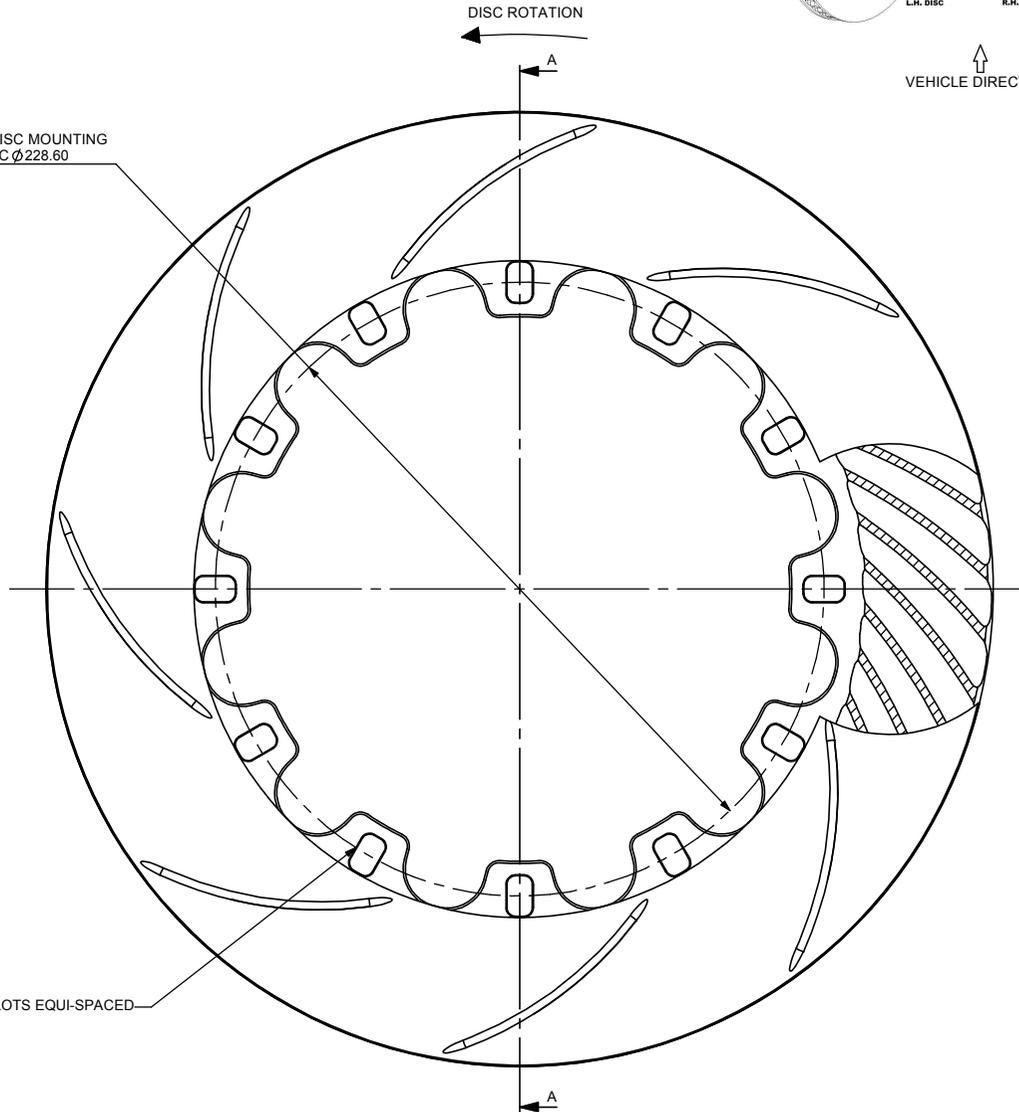

Issue No.	Alterations			Zone	Initials
	Date & No.	Particulars	#		
1	08/04/02 B3327	CURRENT ISSUE			DRA
2	14/03/08 B4460: ID100	0.20 / 0.00 STEP OUT ADDED Ø244.6 ADDED.			DRA

SCALE 1:1	SHEET 1 OF 1
DRAWN	D.ARROWSMITH
APPROVED	
DERIVED FROM	
TITLE	
Ø356 x 35.56	
VENTILATED DISC	
DRG NO.	CP3581-1136 / 1137 CG